

05/21/99  
JCS25 U.S. PTO


Practitioner's Docket No. 270P109

PATENT

NEW APPLICATION TRANSMITTAL

PTO  
JCS25 U.S. PTO  
159951/60  
09/12/99

Box Patent Application  
Assistant Commissioner for Patents  
Washington D.C. 20231



Transmitted herewith for filing is the patent application of:

Inventor 1: Dr. Norm Faiola, Ph.D.  
Address: 114 Concord Place, Ithaca, New York 14850  
Inventor 2: Robert S. Wood, Jr.  
Address: 4818 Limehill Drive, Syracuse, New York 13215  
Inventor 3: Joel Morrisette  
Address: 24 Pirate Lane, Fairfield, Maine 04937

For: FOOD MONITORING SYSTEM FOR MONITORING FOOD  
LOCATED AT FOOD SERVING OR STORAGE LOCATIONS

Enclosed are:

1. Papers enclosed that are required for filing date under 37 CFR 1.53(b)  
(Regular) are:

- 24 Page(s) of Specification
- 13 Page(s) of Claims
- 1 Page(s) of Abstract
- 6 Sheets of Drawings (Figs. )

2. Other Papers Enclosed

☐ A Preliminary Amendment

3. Additional Papers to Follow Under Separate Cover

- ☒ A combined Declaration and Power of Attorney
- ☒ Small Entity Statement
- ☒ An Information Disclosure Statement
- ☒ PTO Form-1449
- ☒ An Assignment Transmittal and Assignment of the invention to Syracuse University

## 4. The filing fee has been calculated as shown below:

For	No. Filed	No. Extra	Rate	Fee
Basic Fee				\$380.00
Total Claims (20)	42	0	\$9.00	198.00
Indep Claims (3)	4	0	\$39.00	39.00
<input type="checkbox"/> Multiple Dependent Claims Presented			x \$130.00	
Total				\$617.00

- ☐ A check in the amount of \_\_\_\_\_ is enclosed.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0289. A duplicate copy of this sheet is enclosed.
- ☐ Any additional filing fees required under 37 CFR 1.16.
- ☐ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

WALL MARJAMA BILINSKI &amp; BURR

Date: May 21, 1999By: George S. BlasiakGeorge S. Blasiak  
Reg. No. 37,283

GSB:jms

WALL MARJAMA BILINSKI & BURR  
101 South Salina Street, Suite 400  
Syracuse, NY 13202  
Telephone: (315) 425-9000  
Facsimile: (315) 425-9114

Customer No.:

**20874**

PATENT TRADEMARK OFFICE

FOOD MONITORING SYSTEM FOR MONITORING FOOD  
LOCATED AT FOOD SERVING OR STORAGE LOCATIONS

Field of the Invention:

5           The present invention relates to monitoring systems in general and in particular to a monitoring system for monitoring food located at food serving or storage locations.

Background of the Invention:

10           Buffet style restaurant facilities and cafeterias commonly contain food in temperature controlled serving containers. Some facilities contain several food service containers, each container being adapted to maintain a certain food product within a certain temperature range for several hours at a time. If food is not maintained within a  
15           predetermined temperature range then food can lose its flavor. More importantly, food spoilage can ensue if food which should be kept at cool temperatures becomes too warm or if food which should be kept at warmer temperatures becomes too cool.

20           Because of the number of injuries which could result from food spoilage, large scale food serving facilities expend a vast amount of resources in assuring that food temperature is maintained properly.

25           Many large scale food service facilities employ inspectors who record food temperature using a specially designed portable data collection device adapted to collect

temperature data from served food. In use of such devices, an inspector places the device in contact with a served food product to record food temperature. One portable data collection device is used to collect data from each of several food product containers. Records over time for various serving or storage containers are kept manually, or, in more sophisticated devices are uploaded from a data collection device at intervals determined by the inspector, to a central processing facility.

Monitoring methods involving use of a portable data collection device are time consuming and require an excessive amount of human labor to be effective. Since these methods require human labor they are also susceptible to failure resulting from human error in the data collection process.

While human error and labor costs always limit the reliability and cost effectiveness of monitoring methods that require human labor, such as those methods involving use of a portable data collection devices, methods in which data is uploaded into computer storage devices are the susceptible to another type of problem. Food monitoring systems in which data is stored in host computers have been observed to be susceptible to tampering schemes which would allow an unscrupulous data collection worker to alter data recorded in

a computer memory to cover up a system operations problem in the event an operations problem is observed.

There is a need for a food monitoring system which accurately monitors the temperature of stored or served food without requiring substantial human labor for effective operation, and which is substantially impervious to data tampering.

Summary of the Invention:

According to its major aspects and broadly stated the present invention is a food monitoring system for use by food service facilities which provides automatic monitoring and recording of data pertaining to food located at several food service or food storage locations. A data processing method associated with the method includes a provision that prevents unscrupulous tampering of stored data.

A monitoring system according to the invention includes a sensing subsystem and a processing subsystem. The sensing subsystem includes at least one sensing device and a transmitter while the processing subsystem normally includes a receiver and personal computer for recording and outputting sensed data. Sensing devices of the sensing subsystem may be in utensil form or in a simplified probe form.

A simplified probe structure for a sensing device

comprises a rigid cylindrical housing and an elongated hollow pin section extending from the housing. In this simple structure a sensor can be completely disposed within a pin section enclosure to completely encapsulate the sensor. This simple structure provides the advantage of making the device easy to clean. Because simplified probe sensing devices do not have to be repeatedly removed from food, several probes can be hard-wired to a single multiprobe transmitter which transmits data from each of several probes to a receiver of the processing subsystem.

Signal processing circuits of the sensing devices receive sensor signals from at least one sensor and assemble digital data bitstreams for transmission to the processing subsystem. In addition to processing signals from at least one sensor, the signal processing circuits of the sensing devices preferably generate bitstream data that encodes a device identifier encoding the identification of the device generating the data.

Data received by the processing subsystem is processed in accordance with instructions of a main program stored in a memory device. According to a typical processing routine, a processor compresses bitstream data, date and time stamps the data, and writes the bitstream data to a file of a memory

device comprising an indexed hierarchical data storage structure adapted facilitate fast reading of data from memory.

To the end that data written to memory cannot readily be altered or otherwise corrupted, the processor subsystem preferably encrypts sensor bitstream data according to an encryption scheme when writing the data to memory. Use of an encryption scheme which cannot be determined without access to the main program's source code substantially prevents tampering of data stored in memory.

In a preferred embodiment, the processor is programmed with use of a sophisticated programming language facilitating graphical display of data which allows data to be observed in a variety of useful ways. The processor is preferably configured to survey all devices currently connected to the system, and to view sensor and battery data over time for any device which has been connected to the system, for any time period in which the system has been in use.

These and other details, advantages and benefits of the present invention will become apparent from the detailed description of the preferred embodiment herein below.

**Brief description of the Drawings:**

In the drawings, wherein like numerals are used to indicate the same elements throughout the views,

Fig. 1A is a physical schematic diagram of an exemplary  
5 embodiment of a system according to the invention;

Fig. 1B is a physical embodiment of probe sensing device which may be used in connection with the invention;

Fig. 2 is an exemplary block electrical diagram of an exemplary electrical system of the invention;

Fig. 3 is a diagram illustrating an exemplary data  
10 bitstream format which may be generated by a sensing device the invention;

Fig. 4 is a flow diagram illustrating an exemplary operation of a data processing method of the invention;

Fig. 5 illustrates an exemplary structure for a time and  
15 date stamped representative bitstream of the invention;

Fig. 6 illustrates a possible indexed hierarchical file structure allowing for quick retrieval of data stored by the system's processing subsystem;

Fig. 7 illustrates a first exemplary display output  
20 according to the invention;

Fig. 8 illustrates a second exemplary display output according to the invention.



Detailed Description:

A physical schematic diagram of the invention is shown in Fig. 1A. System 10 includes sensing subsystem 12 for sensing certain characteristics, most typically temperature characteristics of at least one food product and processing subsystem 14 for outputting and recording data received from the sensing subsystem.

Sensing subsystem 12 includes at least one sensing apparatus for sensing characteristics of food. In the embodiment of Fig. 1A sensing subsystem 12 includes two types of sensing devices for sensing characteristics of served food contained in temperature controlled serving containers 16, which are sometimes referred to as "warming trays". A first type of sensing device for sensing characteristics of served food is a cooking utensil 18 such as a spoon, fork, ladle, or spatula while a second type of sensing device for sensing characteristics of served food is a probe 20, 20', 20''. Both cooking utensils 18 and probes 20 have at least one sensor, typically a temperature sensor, disposed thereon for sensing at least one characteristic of food. Utensils 18 and probes 20 are adapted to be disposed within a food product so that the sensor of the sensing device is in an operational sensing arrangement in relation to the food product. For example if

the sensing device includes a thermal sensor, then the device is adapted so that the thermal sensor is in thermal contact with food when disposed in contact therein. Sensing system 12 includes at least one sensing device such as a utensil or a probe, but more typically will include a plurality of probes, utensils, or combinations of probes and utensils for sensing characteristics of food from several temperature controlled serving containers 16. Sensing subsystem 12 further includes a plurality of transmitters 22, 22', 24 for transmitting data generated from the served food sensing devices to the processing subsystem 14.

While the sensors incorporated in utensils 18 and probes 20 normally include temperature sensors, these devices may also be adapted to include, in addition to or alternatively, other types of sensors such as seismic sensors, pressure (psi) sensors, airflow and weight sensors. Furthermore it will be understood that in addition to having sensing devices for sensing characteristics of served food such as utensils and probes, sensing subsystem 12 may be adapted to include, additionally or alternatively, permanent position sensing devices, such as sensing device 13 for sensing temperature or other characteristics of stored food or other stored material or objects. In the embodiment of Fig. 1A, sensing device 13

is a thermocouple mounted in the interior of a refrigerator 15 which is in communication with a transmitter 17 for transmitting data corresponding to signals generated by thermocouple 13.

5 Processing subsystem 14, meanwhile, may comprise a personal computer 25 as shown in Fig. 1A having a keyboard 26, a mouse 27, a display 28, a processor 66, a memory 68 and a receiver 30 for receiving data from transmitters 17, 22, 22', 24 of the sensor subsystem 12. Processing subsystem 14 may also be provided, for example, by a programmable touch screen in communication with a receiver.

10 A detailed physical schematic diagram of an exemplary probe 20''' of subsystem 12 is shown in Fig. 1B. Probe 20''' includes pin section 32 which is adapted for contact with a food product and a housing section 34 which houses a printed circuit board (PCB) 36 and a battery 37. For adapting probe 20''' to sense temperature, sensor or thermocouple 38 is deposited in pin section 32 and is completely enclosed by pin section 32. Thermocouple 38 may be provided by a type K  
15 thermocouple wire. Temperature indicating signals generated by thermocouple 38 are input to signal processing circuitry of PCB 36 which processes the sensor signal in a manner that will be described herein below.

While probes 20, 20', and 20'' are shown as being hard-wired to a central transmitter 24, probe 20''' of Fig. 1B includes a dedicated transmitter, similar to transmitter 22, having an associated antenna 40. Circuitry for the dedicated transmitter of probe 20''' may be incorporated in PCB 36.

Probes of the type described, while they do not provide the function of being able to aid in the serving of food products, offer important advantages over sensing devices embodied in utensils, such as utensils 18 and 18'.

Probes are simpler in construction than utensil sensing devices, and therefore are more readily made in a configuration that enables them to be easily cleaned and sanitized. An important feature of the probe of the embodiment of Fig. 1B is that thermocouple 38 is disposed entirely within pin section 32, and does not come in direct contact with food products. Utensil sensing devices, by contrast, are not easily made with a thermocouple that is completely enclosed and yet is adapted to be good thermal contact with food in which the utensil is disposed. The National Sanitation Foundation (NSF), an independent not-for-profit organization tests utensils, devices, and tools, for use with food products, and approves them for use with food products only if they meet certain criteria for cleanability.

Especially since the design provides for an enclosed thermocouple, probes of the general configuration described are expected to readily satisfy these criteria.

The fact that probes do not have to be repeatedly inserted into and removed from served food enables a plurality of probes to be hard-wired via conductors 21, 21', 21'' to a single transmitter 24, without substantively affecting the functioning of the devices. By contrast, hard wiring of utensil sensing devices 18, 18' to a central transmitter is not generally viable given the requirement of mobility of such devices. Utilization of a single transmitter 24 to service several simply-constructed probes not intended to be regularly removed from food significantly reduces the overall costs of sensing subsystem 14. To the end that conductors 21, 21', 22' are minimally obtrusive to a food service agent serving food, conductors 21, 21', 22'' may comprise flattened conductor housings and may be fixedly adhered to or otherwise secured to at least one surface in proximity with containers 16, such as surfaces 29, 31 of a member 33 that supports containers 16 as is shown in Fig. 1A.

Additional operational aspects of system 10 are described with reference to Fig. 2 showing an exemplary block electrical diagram for sensing subsystem 12 and processing subsystem 14.

As indicated above, a distinction between utensil sensing devices 18 and probe sensing devices 20 is that while a plurality of probes 20 can be serviced by a single transmitter 24, each utensil sensing device normally is serviced by a dedicated transmitter 22, 22', the circuitry of which is incorporated in utensil handle 23, 23'. Aside from this distinction, utensils and probes 20 have similar electrical configurations.

In a typical embodiment, each sensing device includes a signal processing circuit 46 powered by battery 37 for processing signals from at least one sensor of the device. Normally, the at least one sensor of each device will include a temperature sensor 18. In addition to receiving signals from a temperature sensor 38, signal processing circuit 46 receives signals from battery 37 indicating a voltage level thereof.

In the exemplary embodiment, the signal processing circuit 46 of each device develops a multi-character digital bitstream 50 as represented in Fig. 3 encoding data generated by that device, for transmission to processing subsystem 14. Bitstream 50 may include a first set of bits 52 encoding a preamble for the data transmission (a set of bits indicating the following bits encode valid data), a second set of bits 54

indicating the temperature reading from temperature sensor 38,  
a third set of bits indicating the voltage level of battery  
37. In addition to including sets of bits that include sensor  
data and battery level data, bitstream 50 may also include  
5 sets of bits identifying the particular sensing device  
generating the data. Accordingly, each signal processing  
circuit 46 should include circuit elements generating  
identification stamps indicating the device originating the  
data. Circuit 46 may include circuit elements which generate  
at least two identification stamps, in the form of bit sets of  
bitstream 50, for each device. To the end a data bitstream  
encodes an identifier of the device generating the bitstream,  
a fourth set of bits 58 of bitstream 50 may encode the device  
type (i.e spoon, fork, ladle, spatula, probe) of the device,  
15 while a fifth set of bits 60 of bitstream 50 may encode a  
specific device identifier. A sixth set of bits 62 of  
bitstream generated by circuit 46 should include a postamble  
indicating an end of valid data transmission. Since circuit  
elements for conversion of analog data from sensor 38 and  
20 battery 37 and generating a bitstream of data therefrom, and  
for generating identification bit sets are well known, they  
will not be described further herein.

CONFIDENTIAL - 052200

Signal processing circuit 46 sends data via a conductor to a transmitter 22 which in the case of utensil sensor device is typically a transmitter dedicated for that utensil, and in the case of probe sensor a central transmitter 24 that services a plurality of probes.

Bitstream data which is transmitted by transmitters is received by the processing subsystem 14, which in addition to including a receiver 64 for receiving the transmitted data, may include the elements of a microprocessor 66 which communicates with receiver 64 via an I/O port (not shown), an associated memory 68 (typically including such memory devices as a program memory device, a RAM and a long term storage unit such as a hard drive), a display device 28, and input devices such as a keyboard 26 and mouse 27. When processing subsystem 14 includes a standard microprocessor, receiver 64 is adapted to convert received bitstream data into a format enabling the data to be processed by microprocessor 66, such as an RS 232 format.

Transmitters 17, 22, 22', 24, of the sensor subsystem 12 and receiver 64 of the processing subsystem 14 are preferably provided by RF transmitter and receiver units. However, it will be understood that the transmitters and receiver could be replaced by other wireless communication devices, such as a



group of infrared transmitters and an infrared receiver or other types of hard-wired communication structures such as a multiplexed cable arrangement, a LAN, or an ethernet.

5 Data generated by the various sensor elements 37, 38 of sensor subsystem 12 normally does not have to be sampled at an extremely high sample rate. Although data from the various sensing elements could be sampled at virtually any sample rate from an ultrafast submicrosecond sampling rate to a slower sample rate of once per several minutes, it is normally sufficient to configure system 10 to sample data at a rate that ranges from about once per several seconds to once per several minutes. Typically, system 10 is configured to sample data from each device 18, 20 at a sampling rate of about one sample per minute. Because the data generated by the various devices 18, 20 does not have to be sampled at an extremely high data rate, and the occurrences of collisions between samples are correspondingly rare, it is normally not necessary to establish a high degree of coordination between the receiver 64 and the transmitters 17, 22, 22', 24 of subsystem 12. Accordingly, operable communication between transmitters 22, 22', 24 and receiver 64 can normally be established by configuring transmitters 22, 22' to send bitstream samples generated by their associated sensor device at a rate of about

once per minute, and configuring transmitter 24 so that transmitter 24 transmits samples received at each of its input ports at a rate of about one sample per minute. A sample period should be long enough so that at least one complete bitstream 50 as described with reference to Fig. 3 is assured of being included in each sample. Preferably, a sample period is configured so that each sample contains a plurality of data bitstreams.

Referring now to the flow diagram of Fig. 4, an exemplary method by which processor 66, operating under control of a main program stored in memory 68, may process data samples received by processing subsystem 14 will be explained in detail.

In an exemplary embodiment described in connection with the flow diagram of Fig. 4, processor 66 receives a sample at block 68, which as explained previously typically includes several bitstreams of the general configuration of data bitstream 50 and at block 70 executes a simple compression algorithm to compress the sample bitstream data to a form a single representative bitstream. This simple compression algorithm may comprise, for example, selection of one bitstream out of the several bitstreams, or averaging of data encoded in all or several of the bitstreams of a sample.

After constructing a representative bitstream, processor 66 at block 72 stamps the bitstream with date and time stamps (with year/month/day/time information). When date and time stamping is complete, representative bitstream 78 as shown in Fig. 5 will include sets of bits, e.g. 80, 82, corresponding to the date and time stamps in addition to those bit sets 52, 54, 56, 58, 60, 62 encoding the parameters of the original bitstream 50.

To facilitate fast and efficient retrieval of data stored in memory 68, memory 68 may include files comprising preconfigured indexed hierarchical data storage structures for arranging data pertaining to specific sensing device in a systematic manner. A typical file structure for arranging data in memory 68 so that data may be quickly and efficiently retrieved is described with reference to Fig. 6. In a preferred embodiment, memory 68 includes a file 84 for each sensing subsystem such as subsystem 12 that processing subsystem 14 is configured to monitor. Each file 84, meanwhile, preferably includes a device index tree 85 for each device such as devices 18, 20 included in subsystem 12. Device trees 85, may include indexes 86, 88, 90, 92 pertaining to a device identifier, a date stamp year, a date stamp month, and a date stamp day, respectively. When processor 66 writes

data into memory 68, it writes data to a file and offset location that depends on the identifier bit sets identifying the device originating the data, and the year, month, and day of the date stamp.

5           Before writing time and date stamped representative bitstream 78 to memory 68, processor at block 73 determines whether the present bitstream data pertains to a new sensing device just added to system. If the data does pertain to a new device, processor 66 at block 74 establishes a new device index tree 85 dedicated for storing present and future data pertaining to that particular device.

10           After determining the appropriate file and offset location for the bitstream data, processor at block 75 writes the bitstream data to the determined appropriate file and offset location. While writing data to memory 68, processor 15 66 preferably encrypts the bitstream data so that value or values of the sensor data cannot be determined by inspection, and cannot be determined without knowledge of the specific encryption scheme used and/or without access to a decryption scheme complementary with the employed encryption scheme. 20 Since the employed encryption scheme cannot be determined without access to a high level program language readout of the main program, encryption of data as its is written into memory

68 provides for security of data recordings. The encryption of data written into memory 68 with a secret encryption scheme known only to the software provider prevents an unscrupulous computer records keeper from altering or tampering with stored data in a meaningful and organized way, thereby improving the reliability of computer-stored data. The encryption scheme used may be any commercially available encryption scheme. Encryption schemes which may be used with the present invention are described, for example, in Bruce Schneier, *Applied Cryptography*, Second Edition, John Wiley & Sons, 1996.

Before encrypting data and writing encrypted bitstream data to preconfigured indexed data storage structures of memory 68, processor 68 may drop those sets of bits from bitstream 78 pertaining to the date stamp information (year, month, day) in the interest of conserving memory space. However, the security of the encryption may be improved by maintaining the date stamp bits through the encryption process.

In addition to encrypting data while writing data to memory 68, processing subsystem 14 may be adapted to carry out additional processing functions designed to improve the integrity and security of the data transmission. For example, receiver 30 may be configured to encode sets of bitstreams

received from transmitters 17, 22, 22', 24 with application of an available encoding scheme (known only to the software designer) before sending encoded data to processor 66.

Processor, in turn, in such an embodiment of the invention, would be adapted to decode the encoded sets of bitstreams according to a decoding scheme corresponding to the encoding scheme. Severable applicable encoding and decoding schemes are also described in Schneier's *Applied Cryptography*, referenced above.

In addition to processing received data according to the above described protocol, processing subsystem 14 is also programed to output and display stored data in a variety of ways so as to facilitate useful and informative data analysis. Preferably, the display and data output function of subsystem 14 is programmed with use of a modern high level programming language having sophisticated graphical output capabilities. A preferred programming language for use in programming data output functions of subsystem 14 is Visual C++ 6.0 of the type available from Microsoft corporation of Seattle, WA. Examples of other languages highly suitable for use in programming data processing functions of subsystem 14 are Visual Basic, also available from Microsoft and JAVA available from Sun Microsystems of Santa Clara, CA.

In a first display feature that is described with reference to the graphical output display of Fig. 7, processor 66 is adapted to display at system overview display section 102 all sensing devices e.g. device 18 which have been connected to system 10 and to highlight, with some form of indicia, those devices currently logging data. The indicia indicating a device currently logging data may be, for example, a blinking icon, or a different colored icon, or supplementary icon. To facilitate this display feature, processor 66 may be made to periodically poll the contents of memory 68 to determine the identifier associated with each index tree and to analyze the last data entry entered for each device index tree 85 which has been configured in memory 68. If the time stamp of the last data entry is within a predetermined time of the present time, then the device is determined to be currently logging data. In the specific example of display section 102 a probe such as probe 20 of subsystem 12 is designated as a tray of a set of "warming trays". The system corresponding to display section 102 includes at least two sensing devices, a utensil indicated by "Ladle1" 103, and a probe as indicated by "Tray2" 105. "Ladle1" is currently logging data as is indicated by logging icon 107, while the probe of "Tray2" is not logging data as is

indicated by the absence of icon 107. A determination as to whether the system corresponding to display section 102 includes any forks, spatulas, or spoons can be made by clicking on folder icons 109, 111, 113 pertaining to forks, spatulas or spoons. Subsystem 14 may be programmed so that clicking on these icons causes graphical display of all respective forks, spatulas or spoons of the system 10.

In another display feature, processor 66 is adapted to display the device identifier, device type and the current output of the sensors associated with a particular device. Display section 104 shows a device identifier 106 device type 108, a temperature sensor reading 110, and a battery level reading 112 for two devices connected to an exemplary system. In outputting data on a display screen 28, processor 66 reads bitstream data that has been previously recorded in memory 68, which as previously explained was encrypted when written to, and thus in a form which does not allow the data values to be determined without application of a decryption scheme associated with the scheme for encryption. Accordingly, whenever processor 66 reads data from memory 68 for display, it applies an appropriate decryption scheme to decipher the data before displaying the data on screen 28. Current device sensor values may be obtained by polling the contents of the



last data entry for each device that has been determined to be currently connected to system.

A feature which may be implemented in connection with the feature of displaying current sensor outputs is an alarm feature. For example, if the temperature for a sensing device is not within an acceptable range or if battery power falls below an acceptable limit, then display 28 may be made to generate an indicia indicating an alarm condition. Such indicia may be graphical or audible.

In still another display feature, processor 66 is adapted to display the status of any device which is currently connected to or at one time was connected to system 10 as is illustrated by display section 116. Processor 66 may be configured so that any particular icon of system overview display section 102 may be clicked on via mouse 27 to display detailed information about the device corresponding to that particular icon. In addition to displaying such data as a device type 118, identification code 120, and the logging/not logging status 122 of a device, status section 116 may also display a detailed device description 124 including a text message providing detailed information about the device. A detailed device description may be displayed by accessing a previously established lookup table correlating a device identifier with device description associated with the device.

In yet another display feature, processor 66 is adapted to display sensor data over time for any device or collection of devices of system 10, at any time frame in the history of the operation of system 10. If the icon 130 labeled "history" is clicked on, a user may be prompted to enter data pertaining to a time period of interest. In accordance with the entered time period, processor 66 may read contents from memory 68 for all devices logging data in that time period, or of select devices only, decrypt the data by application of an appropriate decryption scheme, and cause display of the results on screen 28. The output of such data may be in tabular form or in graphical form as illustrated by graphical display 132 of Fig. 8 illustrating an output from a plurality of logging sensors in a selected time period of interest.

While this invention has been described in detail with reference to a preferred embodiment, it should be appreciated that the present invention is not limited to that precise embodiment. Rather, in view of the present disclosure which describes the best mode for practicing the invention, many modifications and variations would present themselves to those skilled in the art without departing from the scope and spirit of this invention, as defined in the following claims.

What is claimed is:

1           1. A monitoring system comprising:  
2           a sensing subsystem having at least one sensing device  
3           for generating at least one data stream; and  
4           a processing subsystem for receiving and processing said  
5           data stream, said processing subsystem including a memory,  
6           said processing subsystem adapted to encrypt said at least one  
7           data stream to form an encrypted data stream corresponding to  
8           said at least one data stream, and being further adapted to  
9           write said encrypted data stream to said memory.

1           2. The monitoring system of claim 1, wherein said at  
2           least one data stream is a digital data bitstream.

1           3. The monitoring system of claim 1, wherein said  
2           processing subsystem is adapted to read said encrypted data  
3           from said memory, and to decrypt said encrypted data while  
4           reading said encrypted data.

1           4. The monitoring system of claim 1, wherein said at  
2           least one sensing device is a probe device adapted for partial  
3           insertion into food.

1           5. The monitoring system of claim 1, wherein said  
2 sensing subsystem includes a transmitter for transmitting said  
3 at least one data stream, and wherein said processing  
4 subsystem includes a receiver for receiving said at least one  
5 data stream.

1           6. The monitoring system of claim 1, wherein said at  
2 least one sensing device includes a temperature sensor and a  
3 battery, and wherein said at least one data stream includes  
4 data pertaining to said temperature sensor and data pertaining  
5 to a power level of said battery.

1           7. The monitoring system of claim 1, wherein said  
2 processing subsystem is adapted to at least one of either date  
3 stamp or time stamp said data stream.

1           8. A monitoring system for monitoring food located at a  
2 food serving or storage locations, said monitoring system  
3 comprising:

4           a sensing subsystem including at least one temperature  
5 sensing device for generating at least one data stream, said  
6 at least one temperature sensing device adapted to be  
7 partially disposed in food at said food serving or storage  
8 location; and

9 a processing subsystem for receiving and processing said  
10 data stream, said processing subsystem including a memory,  
11 said processing subsystem adapted to encrypt said at least one  
12 data stream to form an encrypted data stream corresponding to  
13 said at least one data stream, and being further adapted to  
14 write said encrypted data stream to said memory.

1 9. The monitoring system of claim 8, wherein said at  
2 least one data stream is a digital data bitstream.

3 10. The monitoring system of claim 8, wherein said  
4 processing subsystem is adapted to read said encrypted data  
5 from said memory, and to decrypt said encrypted data while  
6 reading said encrypted data.

7 11. The monitoring system of claim 8, wherein said at  
8 least one sensing device is a probe device adapted for partial  
9 insertion into food.

1 12. The monitoring system of claim 8, wherein said at  
2 least one sensing device is a probe device adapted for partial  
3 insertion into food, said probe device including:

4 a housing;

5 an elongated pin section extending from said housing; and

6 a sensing element completely disposed in, and  
7 encapsulated by said elongated pin section.

1 13. The monitoring system of claim 8, wherein said  
2 sensing subsystem includes a transmitter for transmitting said  
3 at least one data stream, and wherein said processing  
4 subsystem includes a receiver for receiving said at least one  
5 data stream.

1 14. The monitoring system of claim 8, wherein said at  
2 least one temperature sensing device includes a temperature  
3 sensor and a battery, and wherein said at least one data  
4 stream encodes a reading from said temperature sensor and a  
5 power level of said battery.

1 15. The system of claim 8, wherein said at least one  
2 sensing device includes a temperature sensor and a battery,  
3 wherein said at least one data stream of said device includes  
4 data corresponding to said temperature sensor, and data  
5 corresponding to power level of said battery, wherein said  
6 processing subsystem includes a display, and wherein said  
7 processing subsystem is adapted to output on said display  
8 graphical indicia indicating both a temperature and a battery  
9 level associated with said at least one sensing device.

16. The monitoring system of claim 8, wherein said processing subsystem is adapted to at least one of either date stamp or time stamp said data stream.

17. The monitoring system of claim 8, wherein said processing subsystem includes a memory having an indexed hierarchical data storage structure, and wherein said processing subsystem is adapted to write said encrypted data stream to said indexed hierarchical data storage structure.

18. The monitoring system of claim 8, wherein said processing subsystem includes a memory having an indexed hierarchical data storage structure including at least one device index tree indexed by a device identifier and by date stamp data, and wherein said processing subsystem is adapted to write said encrypted data stream to said hierarchical data storage structure indexed by said device identifier and by said date stamp data.

19. The monitoring system of claim 18, wherein said processing subsystem is configured to analyze each received data stream to determine if said received data stream pertains to a sensing device newly added to said system, and wherein said processing system is further configured to establish a

new device index tree in said memory if said processing subsystem determined based on said analysis that said received data stream does pertain to a device newly added to said system.

20. The monitoring system of claim 8, wherein said sensing subsystem includes a sensing apparatus for sensing characteristics of food stored in a plurality of food serving or storage containers, said sensing apparatus comprising:

a central transmitter; and

a plurality of probes, each probe being adapted for partial disposal in one of said containers, said each of said probes being hard-wired to a central transmitter adapted to transmit data from each of said plurality of probes.

21. The monitoring system of claim 20, further comprising:

a member supporting at least one of said plurality of food storage containers; and

at least one conductor forming said hard-wire connection between said at least one of said probes and said transmitter, said conductor being secured to said member so that said conductor is minimally obtrusive to a food service agent serving food.



22. A monitoring system for monitoring food stored in at least one serving or storage container, said monitoring system comprising:

a sensing subsystem including at least one sensing device for generating at least one data stream, said at least one sensing device adapted to be partially disposed in food of said at least one temperature controlled serving container; and

a processing subsystem for receiving and processing said data stream.

23. The system of claim 22, wherein said at least one sensing device includes a temperature sensor and a battery, and wherein said at least one data stream of said device includes data corresponding to said temperature sensor, and data corresponding to power level of said battery.

24. The system of claim 22, wherein said at least one sensing device includes a temperature sensor and a battery, wherein said at least one data stream of said device includes data corresponding to said temperature sensor, and data corresponding to power level of said battery, wherein said processing subsystem includes a display, and wherein said processing subsystem is adapted to output on said display

graphical indicia indicating both a temperature and a battery level associated with said at least one sensing device.

25. The system of claim 22, wherein said at least one sensing device includes a temperature sensor and a battery, wherein said at least one data stream of said device includes data corresponding to said temperature sensor, data corresponding to power level of said battery, and data corresponding to an identifier of said device.

26. The system of claim 22, wherein said at least one sensing device is provided by a probe having an elongated pin section and a temperature sensor disposed in said pin section.

27. The monitoring system of claim 22, wherein said processing subsystem is adapted to at least one of either date stamp or time stamp said data stream.

28. The monitoring system of claim 22, wherein said processing subsystem includes a memory having an indexed hierarchical data storage structure, and wherein said processing subsystem is adapted to write said encrypted data stream to said hierarchical data storage structure.

1           29. The monitoring system of claim 22, wherein said  
2 processing subsystem includes a memory having an indexed  
3 hierarchical data storage structure including at least one  
4 device index tree indexed by a device identifier and by date  
5 stamp data, and wherein said processing subsystem is adapted  
6 to write said encrypted data stream to said indexed  
7 hierarchical data storage structure indexed by said device  
8 identifier and by said date stamp data.

0331651-052709  
1           30. The monitoring system of claim 29, wherein said  
2 processing subsystem is configured to analyze each received  
3 data stream to determine if said received data stream pertains  
4 to a sensing device newly added to said system, and wherein  
5 said processing system is further configured to establish a  
6 new device index tree in said memory if said processing  
7 subsystem determined based on said analysis that said  
8 received data stream does pertain to a device newly added to  
9 said system.

1           31. The monitoring system of claim 22, wherein said  
2 processing subsystem includes a memory, said processing  
3 subsystem adapted to encrypt said at least one data stream to  
4 form an encrypted data stream, and being further adapted to  
5 write said encrypted data stream to said memory.

32. The monitoring system of claim 22, wherein said processing subsystem includes a receiver, a processor, and a memory, wherein said receiver is configured to encode said at least one data stream to create an encoded data stream, and wherein said processing subsystem is further adapted to decode said encoded data stream.

33. The monitoring system of claim 31, wherein said processing subsystem includes a receiver, a processor, and a memory, wherein said receiver is configured to encode said at least one data stream to create an encoded data stream, and wherein said processing subsystem is further adapted to decode said encoded data stream.

34. The monitoring subsystem of claim 22, wherein said processing subsystem includes a display and a memory, wherein said processing system is adapted to output on said display graphical indicia indicating each of said sensing devices which has been connected to said system.

1           35. The monitoring subsystem of claim 22, wherein said  
2 processing subsystem includes a display and a memory, wherein  
3 said processing system is adapted to output on said display  
4 graphical indicia indicating each of said sensing devices  
5 which is currently logging data.

1           36. The monitoring subsystem of claim 22, wherein said  
2 processing subsystem includes a display and a memory, wherein  
3 said processing system is adapted to execute a polling routine  
4 wherein said processing subsystem analyzes the content of data  
5 in said memory to determine the identity of each sensing  
6 device included in said system, and to determine which of said  
7 sensing devices are currently logging data, wherein said  
8 processing subsystem is adapted to output on said display  
9 graphical indicia responsive to said polling routine  
10 indicating each of said sensing devices which has been  
11 connected to said system, and to further output on said  
12 display a logging icon for each device which is currently  
13 logging data.

1           37. The monitoring system of claim 22, wherein said  
2 sensing subsystem includes a sensing apparatus for sensing  
3 characteristics of food stored in a plurality of food serving  
4 or storage containers, said sensing apparatus comprising:

5 a central transmitter; and

6 a plurality of probes, each probe being adapted for  
7 partial disposal in one of said containers, said each of said  
8 probes being hard-wired to a central transmitter adapted to  
9 transmit data from each of said plurality of probes.

1 38. The monitoring system of claim 37, further  
2 comprising:

3 a member supporting at least one of said plurality of  
4 food storage containers; and

5 at least one conductor forming said hard-wire connection  
6 between said at least one of said probes and said transmitter,  
7 said conductor being secured to said member so that said  
8 conductor is minimally obtrusive to a food service agent  
9 serving food.

1 39. A sensing apparatus for sensing characteristics of  
2 food stored in a plurality of food serving or storage  
3 containers, said sensing apparatus comprising:

4 a central transmitter; and

5 a plurality of probes, each probe being adapted for  
6 partial disposal in one of said containers, said each of said  
7 probes being hard-wired to a central transmitter adapted to  
8 transmit data from each of said plurality of probes.

1           40. The sensing apparatus of claim 39, further  
2 comprising:

3           a member supporting at least one of said plurality of  
4 food storage containers; and

5           at least one conductor forming said hard-wire connection  
6 between said at least one of said probes and said transmitter,  
7 said conductor being secured to said member so that said  
8 conductor is minimally obtrusive to a food service agent  
9 serving food.

10           41. The sensing apparatus of claim 40, wherein said at  
11 least one conductor secured to said member includes a  
12 flattened conductor housing.


13           42. The apparatus of claim 39, further comprising a  
14 sensing element, wherein at least one of said probes includes  
15 an elongated pin section housing for disposal in a food  
16 product, said elongated pin section substantially completely  
17 encapsulating said sensing element.

**Abstract of the disclosure:**

The invention is a monitoring system which is particularly useful for monitoring food located at a food serving or storage location. In a preferred embodiment, the system includes a sensing subsystem comprising at least one sensing device in communication with a transmitter and a processing subsystem which may be provided by a personal computer in communication with a receiver. Sensing devices of the sensing subsystem may include several probe sensing devices adapted for easy cleaning which are hard-wired to a central transmitter adapted to transmit data from each of several probe sensing devices. The processing subsystem, meanwhile, may be adapted to encrypt received data while storing data into memory to the end that data stored in memory is substantially impervious to data tampering.



00161641-0021600

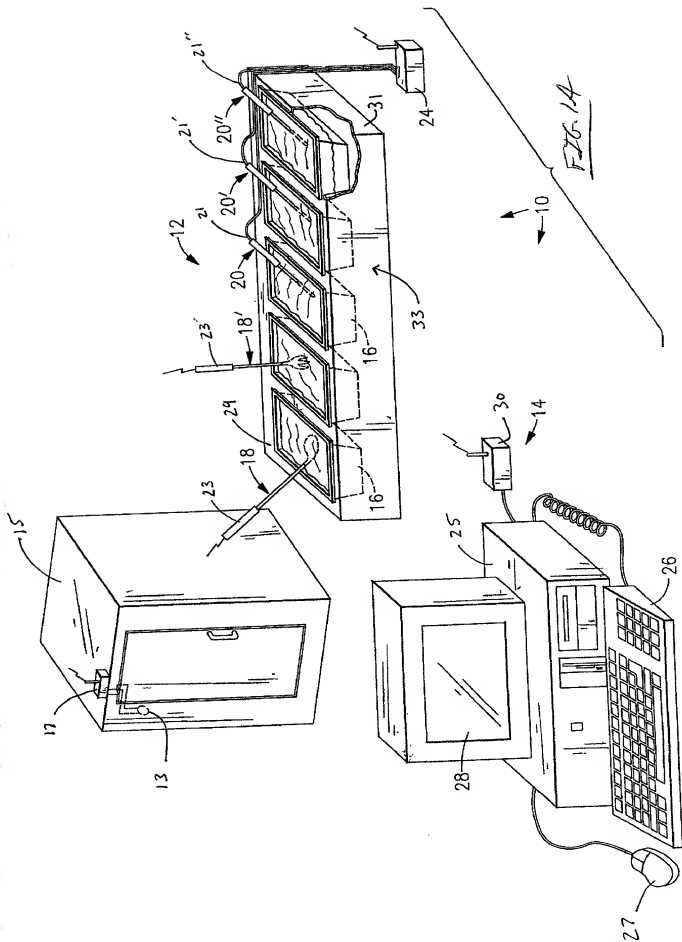

09316571.052199






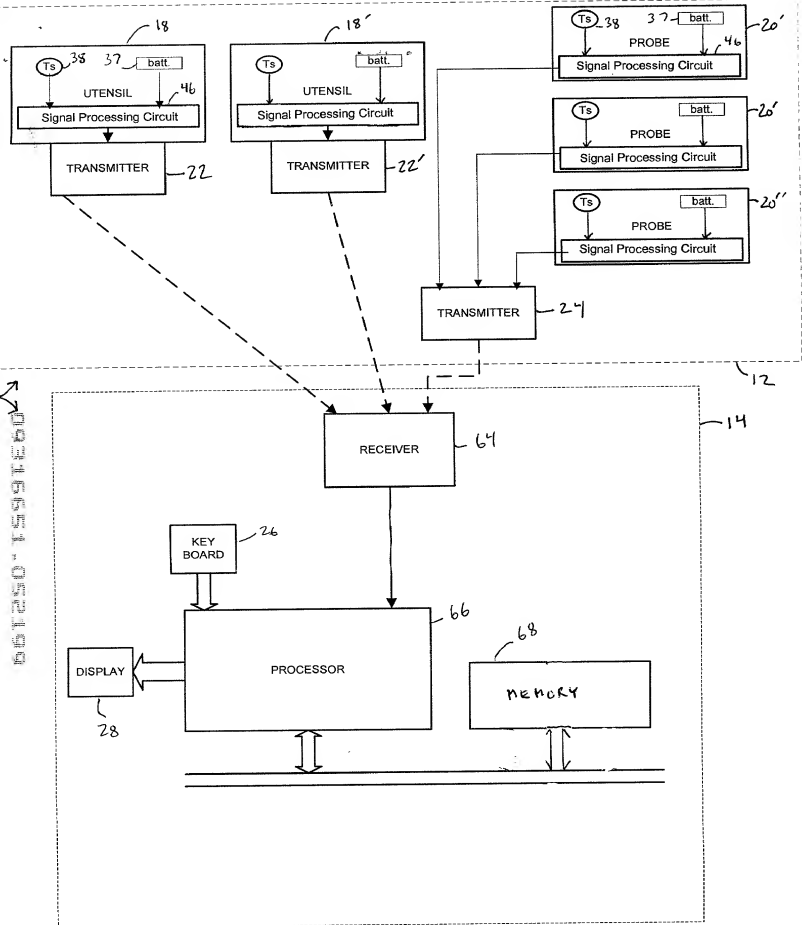


FIG. 2

09316531-052189

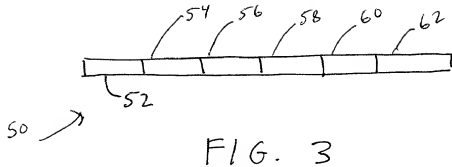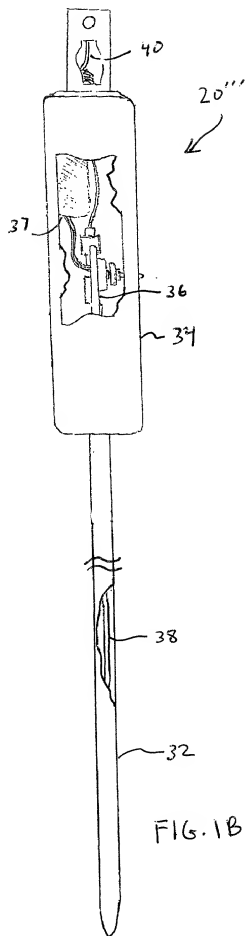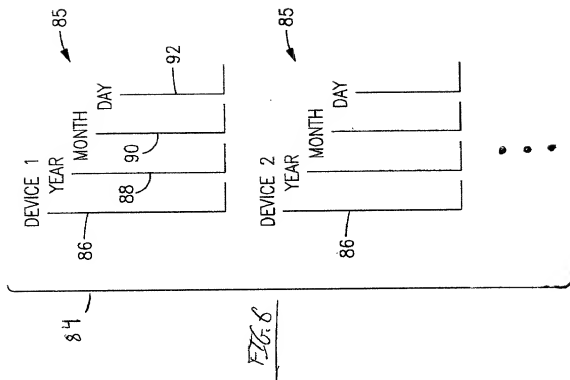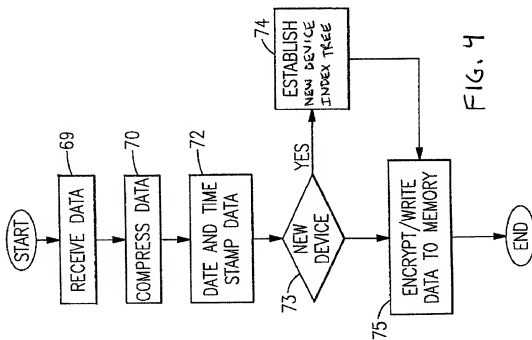



ThermoLog - [ThermoLog1]

File Edit View Window Help

Tools

Graphing

History

Exit

109

103

102

107

130

113

111

105

124

116

120

122

104

Name: Spoon1

Utensil Type: Spoon

ID: 123-456-789

Logging to File:

Description:  
This is a spoon.

Not Logging

Edit

Tool Name	Type	Temperature (C)	Battery (%)
Fork1	Fork	200	10
Spoon	Spoon	200	67

106

108

110

112

For Help, press F1

NUM

FIG - 7

00316651.052109

09316651.052199

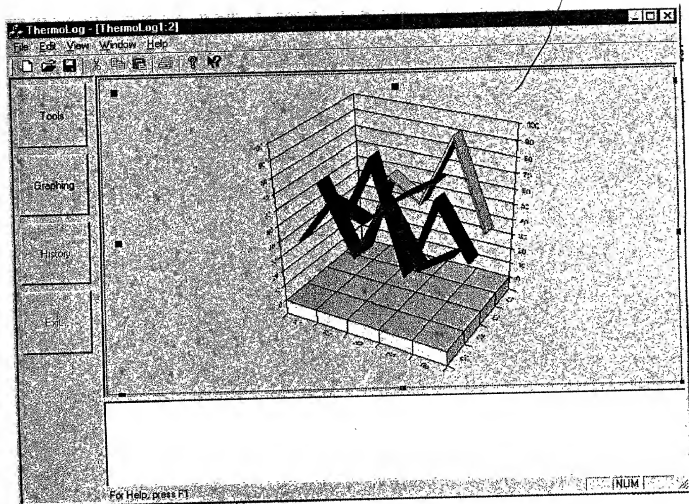


FIG. 8